



County of El Paso Purchasing Department
800 E. Overland Room 300
El Paso, Texas 79901
(915) 546-2048 / Fax: (915) 546-8180
www.epcounty.com

ADDENDUM 1

To: All Interested Bidders

From: Elvia Contreras, Formal Bid Buyer

Date: March 13, 2012

Subject: Bid# 12-018, Uniforms and Body Armor for the El Paso County Sheriff's Department

The Purchasing Department has received the following questions in regards to the above mention bid:

1. On Page 13, under the Deputy Class A Pants, the bid states "triangle bartacks are unacceptable". The entire reason to bartack a garment is to reinforce a stress area (like the edge of a pocket opening) to keep it from pulling or tearing from continued use. The first paragraph on Page 13 states "The corners of the hip pocket openings shall have firm straight bartacks for reinforcing strength". A straight bartack is a single reinforcement. A triangle bartack gives you three times the reinforcement. In everything Blauer does, we put quality and longevity into our products.

Therefore we triangle bartack the stress areas on our trousers. Why would you not want a pant with better reinforcement? In one area of the bid it states that a product that exceeds specs will be considered and/or accepted, and then on these trousers it limits that statement. Please advise. (By the way, on Page 21, for the Detention Officers' uniforms, the bid states the back pockets of the trousers "shall be bartacked with a triangular bartacking machine". We believe the earlier statement for the deputy trousers was put into the spec by Fechheimer, who, since they don't currently make their trousers with the higher level of bartacking, are making an attempt to limit other manufacturers from competing on this bid).

The Triangle Bartacks are acceptable.

2. On Page 16, the bid states "Garment must be made in the United States of America and bear a union label". The bid makes this requirement, yet on a pair

of deputy trousers that I looked at when visiting the Sheriff's Office this year, the tag states "Made in Honduras with U.S. Components". This was a Fechheimer pant. So, the very pant you are buying, and are representing in your bid, isn't even compliant with your requirements. Blauer makes all of our standard uniform shirts and trousers at a factory we own in Merida, Mexico. All products are made from U.S. Components, and are manufactured in Mexico, under the North American Free Trade Agreement. MOST of our competitors manufacture their products at contractors around the world in areas like Honduras, Columbia, Vietnam, etc. Agencies buying products manufactured all over the world tend to get inconsistency in the quality of the manufacturing, and have to deal with long delays in delivery, while waiting for the products to come from overseas. Blauer has control over production and quality, as we own the factory in Merida, and will make all of our uniforms there. Please advice.

We will accept from other countries as long as our specs are met and there are no laws prohibiting from overseas.

3. Total number of Light Weight Jacket?
Total number of Deputy class A pant?
Total number of deputy motorcycle breeches?
Total number of Deputy Police Rain coat?
Total number SRT BDU tactical shirt?
Total number SRT BDU pant?
Total number D.O. Women's class A trouser western pockets?
Total number D.O. Women's short sleeve class A shirt?
Total number D.O. Men's short sleeve class A shirt?
Total number D.O. BDU tactical shirt?
Total number D.O. BDU pants?
Total number Courthouse black pants?
Total number Courthouse Men's shirt long sleeve?
Total number Courthouse Men's shirt short sleeve?
Total number Deputy Body armor?

The total numbers of items listed above are very sporadic in usage. We hold several Detention Officer Classes and Deputy Peace Officers Classes per year averaging 30 or more students per class. Also during the year we replace torn and unserviceable uniforms on a daily basis for all officers. Body Armors we replaced upon expiration. There is no set number but these items need to remain in your stock to be available upon request.

4. Item Deputy body armor treat level IIIA. Can I enter into this bid a body armor with the same or better body armor specs that made with a different material of ballistic construction that is also NIJ rated?
Yes as long as the safety of our officers is never jeopardized and you meet or exceed our specifications.
5. Can the brand name be any other than Fechheimer Brothers Company?
As stated on the page 3 of the Specifications: 3

Brand or Company Names are being used solely for descriptive purposes and not restrictive. All materials and colors must match existing uniforms.

6. What are the brands and the models of the items requested on the body armor?
What type of body armor?

**The brands we have used in the past are First Choice and Safariland.
Vendors must meet or exceed specifications attached.**

7. Please see attachments: "Revised" Deputy Body Armor; Deputy Mens Shirt – Long Sleeve; Ladies Shirt –Long Sleeve, Deputy Men – Short Sleeve, Deputy Women – Short Sleeve

EL PASO COUNTY SHERIFF'S OFFICE

DEPUTY BODY ARMOR

Product Identification:

Monarch Series MR01-Type IIIA
Terminal Velocity Threat Level IIIA Vest NIJ BA-3A00S-MR01

Threat Type:

IIIA

Intended Use and Utility:

The Body Armor ballistic panels are packaged and detailed herein may be inserted into either concealable or tactical Armor wear carriers.

Ballistic Construction:

Unstructured

Panels

Body Armor front ballistic panels for both male and females are constructed of the following materials; 2 Ply, 70 Denier Textured Nylon Blockade with TPU Lamination System.

Armor Material:

Twaron® Micro-laminate, Gold
Shield®, Advanced Stitching using
Center Top Center Tack with Vertical
Side Tacks

Armor Panel Covering:

2 Ply, 70 Denier Textured Nylon
Blockade with TPU lamination system

Areal Density [lbs/ft²]:

1.27

Thickness [inches]:

0.301

ASTM Standard D1777-97

New V50 – .357 SIG FMJ FN 125 gr [ft/s]: 1818

**Conditioned V50 – .357 SIG FMJ FN
125 gr [ft/s]:** 1743

New V50 – .44 Mag JSP 240gr [ft/s]:	1681
Conditioned V50 – .44 Mag JSP 240gr [ft/s]:	1592
Backface Average – .357 SIG:	28.55
Backface Average – .44 Mag:	36.92

Proof of Insurance

Vest manufacturer shall agree to provide a minimum of \$10,000,000.00 product liability insurance per occurrence coverage on delivered vests.

Carriers:

2 Black

Body Armors should be tested in accordance with NIJ 0101.06 Standard.

Turn Around Time for delivery must be 30 days from receipt of Purchase Order.

*****SAMPLES ARE TO BE PROVIDED WITH BID*****

Deputy Mens Shirt - Long Sleeve

Fabric:

<u>Content:</u>	All synthetic tropical weave 65% Dacron Polyester/35% Rayon conforming to the following specifications:
<u>Weight:</u>	10.0 – 10.5 oz. / linear yard
<u>Construction:</u>	49 warp X 36 filling yarns per sq. inch All yarns size 10/1 singles
<u>Tear Strength:</u>	Tear Strength 9.7 warp 8.5 filling (lbs.)
<u>Tensile:</u>	Break Strength 105 warp - 90 filling (lbs.)

Color:



Silver Grey with Black matching standard sample on display.

Style:

Plain front coat style, form fitting, collar attached, long sleeves with barrel cuffs, and dress shirttail. Two pleated breast pockets with contrasting black scalloped flaps and shoulder straps. Full badge reinforcement. Matching inside yoke and collar band of Dacron/Cotton Poplin. Work wear industrial style shirt construction is unacceptable and shall be cause for rejection.

Collar & Stand:


Style and dimensions as sample on display. Collar points to measure 3" long with fused-in Mylar stays. Stays to be 2 3/4" long, 3/8" minimum width, and to be fused to underside of collar interlining. Stays applied directly to collar material itself unacceptable. Collar height at rear 1 1/2". Topstitched 1/4" off the edge. Collar stand to measure 1 5/16" at rear and band to be die cut and interlined with stabilized Mello-Press (#285 in collar, "Crease N Tack" in band). Collar material itself (top or underside) shall have no fusing to Mylar stays or collar interlining.



Front:

The left front shall have a top center placket 1 1/2" wide with two rows of stitches 7/8" apart. The shirt will have 7 buttons and buttonholes on the front; spacing between each will be 3 3/4" except the spacing between the neck button and the first button on the front, which will be approximately 3-1/4". Top center interlined with #550 MelloPress. Non-woven interlining unacceptable and shall be cause for rejection. The fronts shall be joined to the yoke so that both raw edges of the


yoke are turned under, with the front sandwiched between, and then all three are stitched down with a 1/16" raised stitch. Safety stitch joining unacceptable. A 15 in nylon zipper, to be set below the second button and button hole, shall accomplish front closure.



Shoulder Straps:

Contrasting shoulder straps of Black Polyester/Rayon. Asymmetrical shape topstitched, two-piece pointed, 1/4" off the edge to be set on yoke with leading topstitches conforming with front joining seam. To measure 2" at sleeve tapering to 1 3/8" and set not more than 1/2" from folded collar. Cross-stitched approximately 2" from sleeve seam. Shoulder Straps to have functional buttonhole to attach to sewn button on shoulder of shirt. Creased and edge stitched shoulder strap construction unacceptable


SHOULDER STRAP

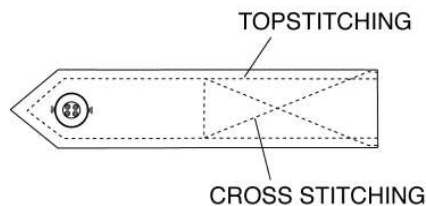

Badge Reinforcement:


Two-ply sling 1" wide centered over left pocket and stitched to shoulder seam and flap setting stitch. To have 2 buttonhole eyelets approximately 1 1/4" from top of pocket flap spaced 1 1/4" apart and centered on sling.

BADGE TAB

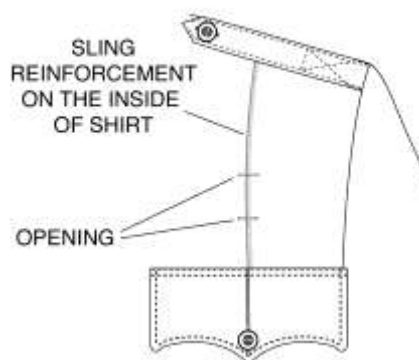

Pockets:

Two breast pockets with 1 1/2" stitched pleats and mitred corners. Pocket to measure 5 5/8" wide, 6" deep. Left breast pocket to have 1 1/2" pencil stitch. Each pocket to have Velcro tape 3/4" long by 1/2" wide positioned on both edges of pocket to correspond with outer scalloped flap points as sample.

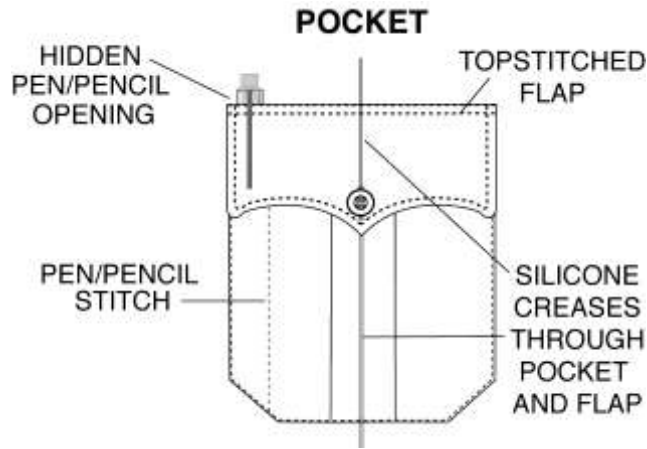

Flaps:


Contrasting pocket flaps of Black Polyester/Rayon., two piece, Deep scalloped design to measure 5 7/8" across and 2 3/4" in depth at center point, 2 1/4" at sides. Top stitched 1/4" off the edge. Secured to shirt front approximately 1/4" above pocket. Left flap to have invisible pencil opening 1 1/2" to correspond precisely with pencil slot of pocket. Stop & start stitching for pencil opening unacceptable and shall be cause for rejection. Both flaps to be interlined with #550 stabilized MelloPress. Creased and edge stitched pocket flap construction unacceptable. Underside of flap to have Velcro tape 3/4" long by 1/2" wide positioned on outer points of both pocket flaps as sample. Each flap shall have a button centered on uncut sewn buttonhole.

Sleeves:

Straight at width - no bias - of one piece shaped at head, jacket type. Sleeve vents 4 1/2" long with top and bottom facings. Top facing to measure 1 1/8" wide point blocked at top. Underfacing 1/2" wide.

Cuffs:

Two piece 1/2-inch hemmed cuff with 1/4-inch topstitching. To measure 3" in depth with rounded corners as sample. With two buttons and corresponding buttonholes on each cuff and one button and buttonhole in center of facing. Both cuffs to be interlined with stabilized #550 stabilized Mello-Press.

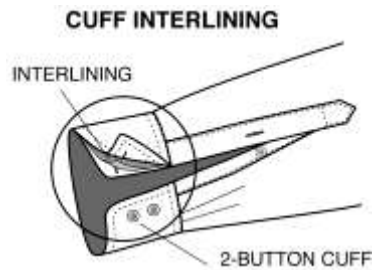

Buttons:

First grade 19-ligne pearlescent plastic to match.

Sewing:

Single needle throughout. All topstitched 1/4" off the edge. Sleeve inserting and side close felling safety stitched.

Thread:

All sewing threads to be fast color polyester core polyester wrap to match.

Interlining:

Collars to be interlined with #285 stabilized Mello-Press. Cuffs, Pocket Flaps and Top Center to be interlined with #550 stabilized Mello-Press. Collar Band interlined with Crease N Tack.

Military Creases:

5 silicone military creases on all shirts. One crease on each front to be centered vertically through pocket and flap. Spacing for military creases on Shirt back to be proportionate to the size of the Shirt as follows: sizes 14 through 15 ½ - creases to be 4 ¾" apart; sizes 16 through 18, inclusive – creases to be 5 3/8" apart as measured from the center crease.

Construction:

Collars, flaps and shoulder straps are made by the conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

Country of Manufacture:

All raw materials and assembly thereof made in the U.S.A.

**Finished
Length
Dimensions:**

<u>SIZE</u>	<u>SIDE SEAMS</u>	<u>BACK LENGTH</u>
13	17 ½	30 ¾
13 ½	17 5/8	31
14	17 ¾	31 ¼
14 ½	17 7/8	31 ½
15	18	31 ¾
15 ½	18 1/8	32
16	18 ¼	32 ¼
16 ½	18 3/8	32 ½
17	18 ½	32 ¾
17 ½	19 5/8	34
18	19 ¾	34 ¼
18 ½	19 7/8	34 ½
19	20	34 ¾
19 ½	20 1/8	35
20	20 ¼	35 ¼
20 ½	20 3/8	35 ½

DEPUTY LADIES SHIRT - LONG SLEEVE

Fabric:

<u>Content:</u>	All synthetic tropical weave 65% Dacron Polyester/35% Rayon conforming to the following specifications:
<u>Weight:</u>	10.0 – 10.5 oz. / linear yard
<u>Construction:</u>	49 warp X 36 filling yarns per sq. inch All yarns size 10/1 singles
<u>Tear Strength:</u>	Tear Strength 9.7 warp 8.5 filling (lbs.)
<u>Tensile:</u>	Break Strength 105 warp - 90 filling (lbs.)

Color:



Silver Grey with Black matching standard sample on display.

Style:

Plain front coat style, form fitting, collar attached, long sleeves with barrel cuffs, and dress shirttail. Two pleated breast pockets with contrasting black scalloped flaps and shoulder straps. Full badge reinforcement. Matching inside yoke and collar band of Dacron/Cotton Poplin. Work wear industrial style shirt construction is unacceptable and shall be cause for rejection.

Collar & Stand:


Style and dimensions as sample on display. Collar points to measure 3 " long with fused-in Mylar stays. Stays to be 2 3/4" long, 3/8" minimum width, and to be fused to underside of collar interlining. Stays applied directly to collar material itself unacceptable. Collar height at rear 1 1/2". Topstitched 1/4" off the edge. Collar stand to measure 1 5/16" at rear and band to be die cut and interlined with stabilized Mello-Press (#285 in collar, "Crease N Tack" in band). Collar material itself (top or underside) shall have no fusing to Mylar stays or collar interlining.



Front:

The left front shall have a top center placket 1 1/2" wide with two rows of stitches 7/8" apart. The shirt will have 7 buttons and buttonholes on the front; spacing between each will be 3 3/4" except the spacing between the neck button and the first button on the front, which will be approximately 3-1/4". Top center interlined with #550 Mello Press. Non-woven interlining unacceptable and shall be cause


for rejection. The fronts shall be joined to the yoke so that both raw edges of the yoke are turned under, with the front sandwiched between, and then all three are stitched down with a 1/16" raised stitch. Safety stitch joining unacceptable. A 15 in nylon zipper, to be set below the second button and button hole, shall accomplish front closure.



Shoulder Straps:

Contrasting shoulder straps of Black Polyester/Rayon. A symmetrical shape topstitched, two-piece pointed, 1/4" off the edge to be set on yoke with leading topstitches conforming with front joining seam. To measure 2" at sleeve tapering to 1 3/8" and set not more than 1/2" from folded collar. Cross-stitched approximately 2" from sleeve seam. Shoulder Straps to have functional buttonhole to attach to sewn button on shoulder of shirt. Creased and edge stitched shoulder strap construction unacceptable


SHOULDER STRAP

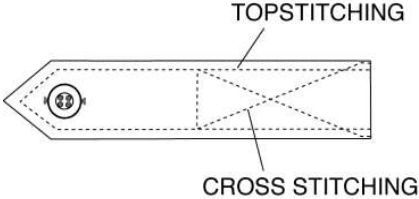

Badge Reinforcement:


Two-ply sling 1" wide centered over left pocket and stitched to shoulder seam and flap setting stitch. To have 2 buttonhole eyelets approximately 1 1/4" from top of pocket flap spaced 1 1/4" apart and centered on sling.

BADGE TAB

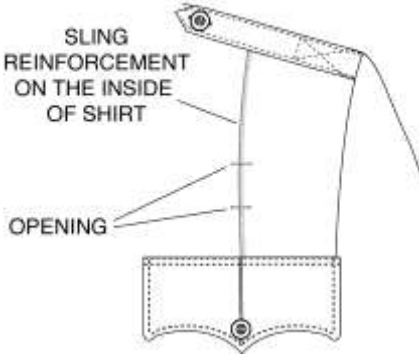

Pockets:

Two breast pockets with 1 1/2" stitched pleats and mitred corners. Pocket to measure 5 5/8" wide, 6" deep. Left breast pocket to have 1 1/2" pencil stitch. Each pocket to have Velcro tape 3/4" long by 1/2" wide positioned on both edges of pocket to correspond with outer scalloped flap points as sample.

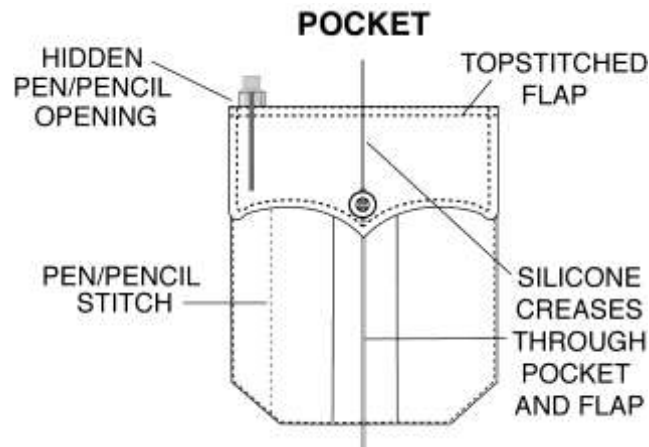

Flaps:

Contrasting pocket flaps of Black Polyester/Rayon., two piece, Deep scalloped design to measure 5 7/8" across and 2 3/4" in depth at center point, 2 1/4" at sides. Top stitched 1/4" off the edge. Secured to shirt front approximately 1/4" above pocket. Left flap to have invisible pencil opening 1 1/2" to correspond precisely with pencil slot of pocket. Stop & start stitching for pencil opening unacceptable and shall be cause for rejection. Both flaps to be interlined with #550 stabilized MelloPress. Creased and edge stitched pocket flap construction unacceptable. Underside of flap to have Velcro tape 3/4" long by 1/2" wide positioned on outer points of both pocket flaps as sample. Each flap shall have a button centered on uncut sewn buttonhole.

Sleeves:

Straight at width - no bias - of one piece shaped at head, jacket type. Sleeve vents 4 1/2" long with top and bottom facings. Top facing to measure 1 1/8" wide point blocked at top. Underfacing 1/2" wide.

Cuffs:

Two piece 1/2-inch hemmed cuff with 1/4-inch topstitching. To measure 3" in depth with rounded corners as sample. With two buttons and corresponding buttonholes on each cuff and one button and buttonhole in center of facing. Both cuffs to be interlined with stabilized #550 stabilized Mello-Press.



Buttons:

First grade 19-ligne pearlescent plastic to match.

Sewing:

Single needle throughout. All topstitched 1/4" off the edge. Sleeve inserting and side close felling safety stitched.

Thread:

All sewing threads to be fast color polyester core polyester wrap to match.

Interlining:

Collars to be interlined with #285 stabilized Mello-Press. Cuffs, Pocket Flaps and Top Center to be interlined with #550 stabilized Mello-Press. Collar Band interlined with Crease N Tack.

Military Creases:

5 silicone military creases on all shirts. One crease on each front to be centered vertically through pocket and flap. Spacing for military creases on Shirt back to be proportionate to the size of the Shirt as follows: sizes 14 through 15 ½ - creases to be 4 ¾" apart; sizes 16 through 18, inclusive – creases to be 5 3/8" apart as measured from the center crease.

Construction:

Collars, flaps and shoulder straps are made by the conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

Country of Manufacture:

All raw materials and assembly thereof made in the U.S.A.

Finished Length Dimensions:

<u>SIZE</u>	<u>SIDE SEAMS</u>	<u>BACK LENGTH</u>
13	17 ½	30 ¾
13 ½	17 5/8	31
14	17 ¾	31 ¼
14 ½	17 7/8	31 ½
15	18	31 ¾
15 ½	18 1/8	32
16	18 ¼	32 ¼
16 ½	18 3/8	32 ½
17	18 ½	32 ¾
17 ½	19 5/8	34
18	19 ¾	34 ¼
18 ½	19 7/8	34 ½
19	20	34 ¾
19 ½	20 1/8	35
20	20 ¼	35 ¼
20 ½	20 3/8	35 ½

**DEPUTY MEN
SHIRT - SHORT SLEEVE**

Fabric:

Content: 100% Textured Polyester conforming to the following specifications: 65% Dacron Polyester / 35% Rayon
Weight: 10.0 to 10.50 oz/ Linear yd.
Construction: 67 warp X 49 filling yarns per sq. inch
Tear Strength: Warp 6.6 lbs. Filling 8.5 lbs.
Tensile: Warp 159 lbs. Filling 155 lbs.

Color:

Grey/silver matching standard sample on display.


Style:

Plain front coat style with full-length tail, form-fitting, convertible collar, short sleeves. Two pleated breast pockets with scalloped flaps. Shoulder straps. Full badge reinforcement. Matching inside yoke and banana band of high luster Poly Twill, to match Flying Cross Model 663R6641.

Collar:

Convertible collar shall be one piece and collar points to measure 3" long fused-in Mylar stays ultrasonically. Top stitched $\frac{1}{4}$ " off the edge. Collar to be interlined with #285 Stabilized Mello Press. Collar topstitched $\frac{1}{4}$ " off the edge. Stays to be $2\frac{3}{4}$ " long, $\frac{3}{8}$ " minimum width, fused to underside of collar interlining.


**COLLAR
(UNDERSIDE VIEW)**

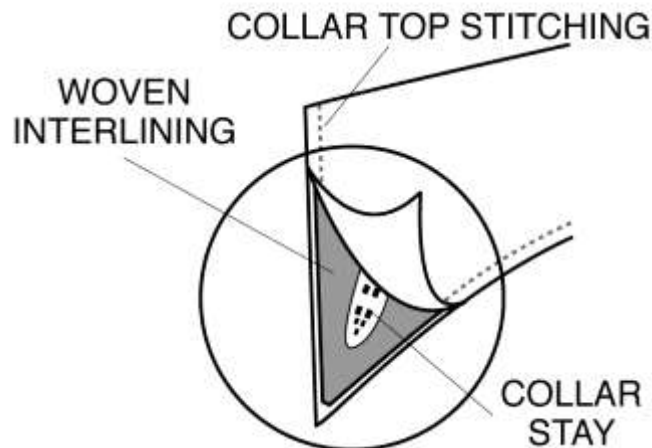

Front:

Each front shall have a facing 3" in width. The left front shall have a top center $1\frac{1}{2}$ " wide with two rows of stitches $\frac{7}{8}$ " apart. Stitching on top center is not to be visible on the turn-back facing. The shirt will have 7 buttons and buttonholes on the front; spacing between each will be $3\frac{3}{4}$ " except the spacing between the


neck button and the first button on the front, which will be 2 ½". Top center interlined with #550 Mello-Press. The fronts shall be joined to the yoke so that both raw edges of the yoke are turned under, with the front sandwiched between, and then all three are stitched down with a 1/16" raised stitch. Safety stitch joining unacceptable. A 15' nylon zipper, to be set below the second button and buttonhole, shall accomplish front closure. The top, second and bottom buttons to be attached to the right front, the balance to be sewn over the buttonholes on the left front.

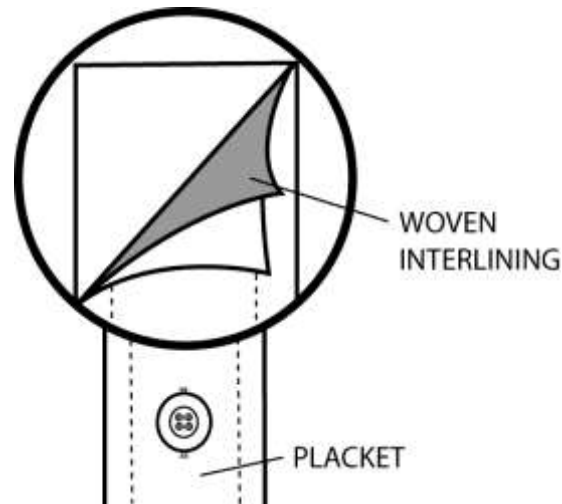

Shoulder Straps

Style and dimensions as sample A symmetrical shape topstitched 1/4" off the edge to be set on yoke with leading topstitches conforming with front joining seam. To measure 2" at sleeve tapering to 1 3/8" and set not more than 1/2" from folded collar. Cross-stitched approximately 2" from sleeve seam. Creased and edge stitched shoulder strap construction unacceptable. Shoulder strap to have functional button hole to attach to sewn button on shoulder of shirt. The color of the shoulder strap will be black.


SHOULDER STRAP

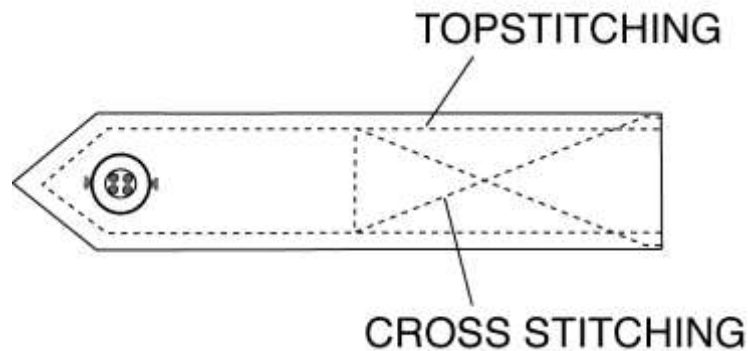

Badge Reinforcement:

Two-ply sling 1" wide centered over left pocket and stitched to shoulder seam and flap setting stitch. To have 2 buttonhole eyelets approximately 1 1/4" from top of pocket flap spaced 1 1/4" apart and centered on sling.


BADGE TAB

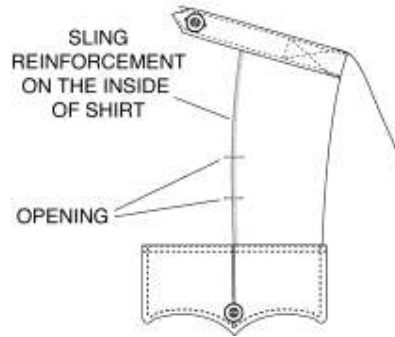

Pockets:

Two breast pockets with 1 1/2" stitched pleats and mitred corners. Pocket to measure 5 5/8" wide, 6" deep. Left breast pocket to have 1 1/2" pencil stitch. Each pocket to have Velcro tape 3/4" long by 1/2" wide positioned on both edges of pocket to correspond with outer scalloped flap points as sample. Pleats shall be stitched top and bottom and full length of pleat to prevent any type of spreading. Velcro to be stitched all sides and to sewn through pocket and shirt for added reinforcement.


POCKET

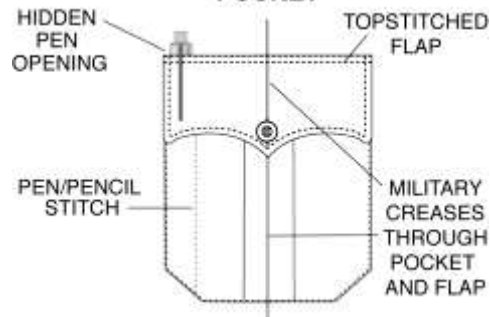

Flaps:

Deep scalloped design to measure 5 7/8" across and 2 3/4" in depth at center point, 2 1/4" at sides. Topstitched 1/4" off the edge. Secured to shirtfront approximately 1/4" above pocket. Left flap to have invisible pencil opening 1 1/2" to correspond precisely with pencil slot of pocket. Both flaps to be interlined with #550 Stabilized Mello Press. Creased and edge stitched pocket flap construction unacceptable. Underside of flap to have Velcro tape 3/4" long by 1/2" wide positioned on outer points of both pocket flaps as sample. The color of the flap will be black.

FLAP

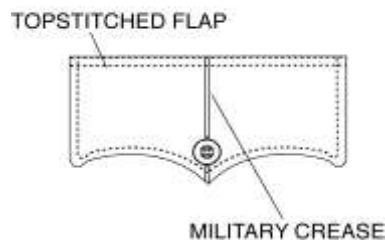

Sleeves:

Sleeves are to be straight and whole, to have $\frac{3}{4}$ " hem and to finish approximately 9 $\frac{1}{2}$ " long from shoulder seams.

Buttons:

First grade 19-ligne pearlescent plastic to match.

Sewing:

Single needle throughout. All topstitched $\frac{1}{4}$ " off the edge. Sleeve inserting and side close felling seams to be safety stitched.

Thread:

All sewing threads to be fast color polyester core polyester wrap to match.

Interlining:

Pocket Flaps and Top Center to be interlined with Stabilized Mello Press #550. Collar band to be interlined with #285 Stabilized Mello Press.

Military Creases:

5 stitched-in military creases on all Shirts. One crease on each front to be centered vertically. Front creases through pockets and flaps. Spacing for military creases on Shirt back to be proportionate to the size of the Shirt as follows: sizes 14 through 15 $\frac{1}{2}$ - creases to be 4 $\frac{3}{4}$ ' apart; sizes 16 through 18, inclusive – creases to be 5 $\frac{3}{8}$ " apart as measured from the center crease.

Construction:

Collars and flaps are made by the conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned rightside out and finally topstitched.

Country of Manufacture:

All raw materials and assembly thereof made in the U.S.A

Finished Length Dimensions:

<u>SIZE</u>	<u>SIDE SEAMS</u>	<u>BACK LENGTH</u>
XS	17 $\frac{5}{8}$	31
S	17 $\frac{7}{8}$	31 $\frac{1}{2}$
M	18 $\frac{1}{8}$	32
L	18 $\frac{3}{8}$	32 $\frac{1}{2}$
XL	19 $\frac{5}{8}$	34
2XL	19 $\frac{7}{8}$	34 $\frac{1}{2}$
3XL	20 $\frac{1}{8}$	35
4XL	20 $\frac{3}{8}$	35 $\frac{1}{2}$

DEPUTY WOMENS SHIRT - SHORT SLEEVE

Fabric:

<u>Content:</u>	100% Textured Polyester conforming to the following specifications: 65% Dacron Polyester / 35% Rayon
<u>Weight:</u>	10.0 to 10.50 oz/ Linear yd.
<u>Construction:</u>	67 warp X 49 filling yarns per sq. inch
<u>Tear Strength:</u>	Warp 6.6 lbs. Filling 8.5 lbs.
<u>Tensile:</u>	Warp 159 lbs. Filling 155 lbs.

Color:

Grey/silver matching standard sample on display.


Style:

Plain front coat style with full-length tail, form-fitting, convertible collar, short sleeves. Two pleated breast pockets with scalloped flaps. Shoulder straps. Full badge reinforcement. Matching inside yoke and banana band of high luster Poly Twill, to match Flying Cross Model 663R6641.

Collar:

Convertible collar shall be one piece and collar points to measure 3" long fused-in Mylar stays ultrasonically. Top stitched $\frac{1}{4}$ " off the edge. Collar to be interlined with #285 Stabilized Mello Press. Collar topstitched $\frac{1}{4}$ " off the edge. Stays to be $2\frac{3}{4}$ " long, $\frac{3}{8}$ " minimum width, fused to underside of collar interlining.

COLLAR (UNDERSIDE VIEW)

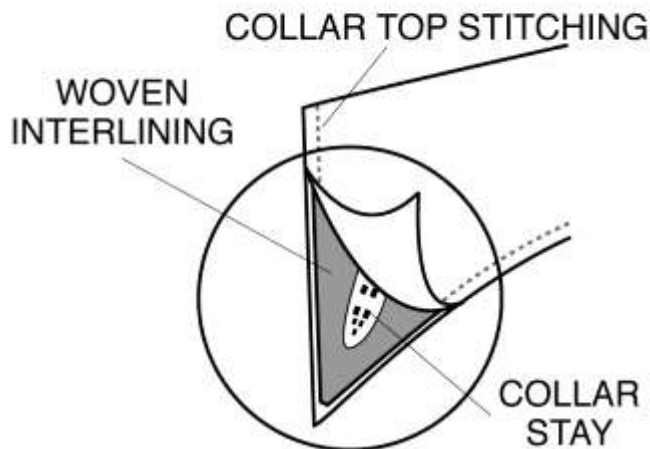


Front:

Each front shall have a facing 3" in width. The left front shall have a top center $1\frac{1}{2}$ " wide with two rows of stitches $\frac{7}{8}$ " apart. Stitching on top center is not to be

visible on the turn-back facing. The shirt will have 7 buttons and buttonholes on the front; spacing between each will be 3 3/4" except the spacing between the


neck button and the first button on the front, which will be 2 1/2". Top center interlined with #550 Mello-Press. The fronts shall be joined to the yoke so that both raw edges of the yoke are turned under, with the front sandwiched between, and then all three are stitched down with a 1/16" raised stitch. Safety stitch joining unacceptable. A 15' nylon zipper, to be set below the second button and buttonhole, shall accomplish front closure. The top, second and bottom buttons to be attached to the right front, the balance to be sewn over the buttonholes on the left front.

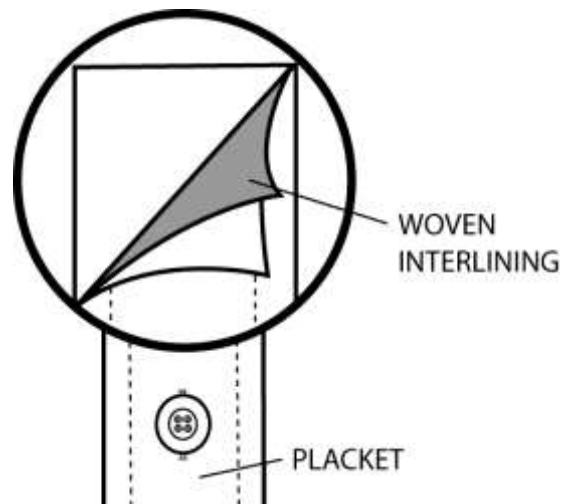

Shoulder Straps:


Style and dimensions as sample A symmetrical shape topstitched 1/4" off the edge to be set on yoke with leading topstitches conforming with front joining seam. To measure 2" at sleeve tapering to 1 3/8" and set not more than 1/2" from folded collar. Cross-stitched approximately 2" from sleeve seam. Creased and edge stitched shoulder strap construction unacceptable. Shoulder strap to have functional button hole to attach to sewn button on shoulder of shirt. The color of the shoulder strap will be black.

SHOULDER STRAP

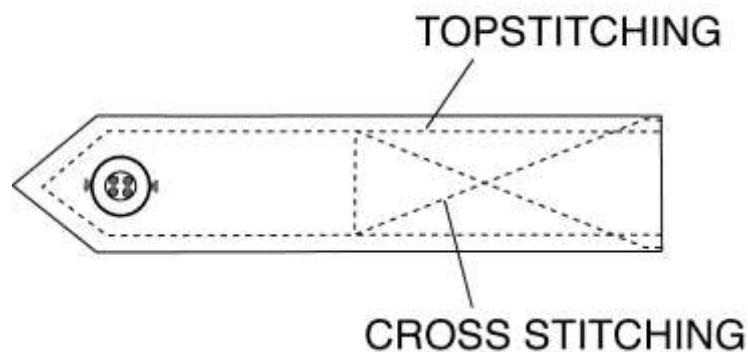


Badge Reinforcement:

Two-ply sling 1" wide centered over left pocket and stitched to shoulder seam and flap setting stitch. To have 2 buttonhole eyelets approximately 1 1/4" from top of pocket flap spaced 1 1/4" apart and centered on sling.

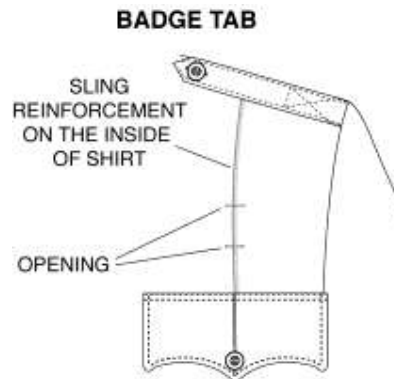


Pockets:

Two breast pockets with 1 1/2" stitched pleats and mitred corners. Pocket to measure 5 5/8" wide, 6" deep. Left breast pocket to have 1 1/2" pencil stitch. Each pocket to have Velcro tape 3/4" long by 1/2" wide positioned on both edges of pocket to correspond with outer scalloped flap points as sample. Pleats shall be stitched top and bottom and full length of pleat to prevent any type of spreading. Velcro to be stitched all sides and to sewn through pocket and shirt for added reinforcement.

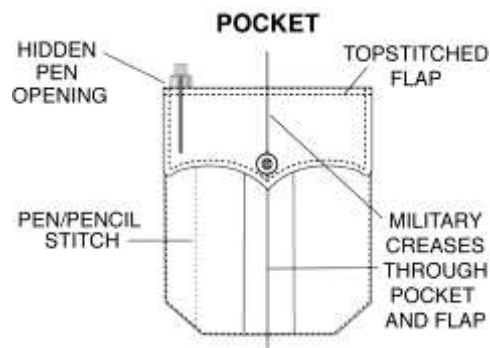

Flaps:

Deep scalloped design to measure 5 7/8" across and 2 3/4" in depth at center point, 2 1/4" at sides. Topstitched 1/4" off the edge. Secured to shirtfront approximately 1/4" above pocket. Left flap to have invisible pencil opening 1 1/2" to correspond precisely with pencil slot of pocket. Both flaps to be interlined with #550 Stabilized Mello Press. Creased and edge stitched pocket flap construction unacceptable. Underside of flap to have Velcro tape 3/4" long by 1/2" wide positioned on outer points of both pocket flaps as sample. The color of the flap will be black.

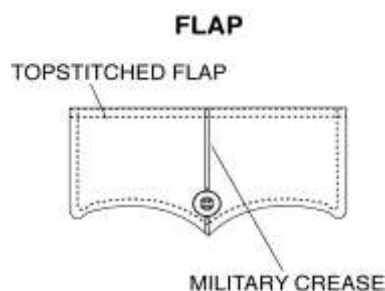

Sleeves:

Sleeves are to be straight and whole, to have $\frac{3}{4}$ " hem and to finish approximately 9 $\frac{1}{2}$ " long from shoulder seams.

Buttons:

First grade 19-ligne pearlescent plastic to match.

Sewing:

Single needle throughout. All topstitched $\frac{1}{4}$ " off the edge. Sleeve inserting and side close felling seams to be safety stitched.

Thread:

All sewing threads to be fast color polyester core polyester wrap to match.

Interlining:

Pocket Flaps and Top Center to be interlined with Stabilized Mello Press #550.
Collar band to be interlined with #285 Stabilized Mello Press.

Military Creases:

5 stitched-in military creases on all Shirts. One crease on each front to be centered vertically. Front creases through pockets and flaps. Spacing for military creases on Shirt back to be proportionate to the size of the Shirt as follows: sizes 14 through 15 $\frac{1}{2}$ - creases to be 4 $\frac{3}{4}$ ' apart; sizes 16 through 18, inclusive – creases to be 5 $\frac{3}{8}$ " apart as measured from the center crease.

Construction:

Collars and flaps are made by the conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

Country of Manufacture:

All raw materials and assembly thereof made in the U.S.A.

Finished Length Dimensions:

<u>SIZE</u>	<u>SIDE SEAMS</u>	<u>BACK</u>
XS	17 $\frac{5}{8}$	31
S	17 $\frac{7}{8}$	31 $\frac{1}{2}$
M	18 $\frac{1}{8}$	32
L	18 $\frac{3}{8}$	32 $\frac{1}{2}$
XL	19 $\frac{5}{8}$	34
2XL	19 $\frac{7}{8}$	34 $\frac{1}{2}$
3XL	20 $\frac{1}{8}$	35
4XL	20 $\frac{3}{8}$	35 $\frac{1}{2}$

BIDDING SCHEDULE

To: El Paso County, Texas

I or we agree to furnish the following described equipment, supplies, or services for the prices shown in accordance with specifications listed below or attached. By execution of this bid, I hereby represent and warrant to El Paso County that I have read and understood the Bid Documents and the Contract Documents and this bid is made in accordance with the Bid Documents.

Please quote prices and discounts on the following items:

F. O. B. El Paso County

Description – Bid #12-018 Uniforms and Body Armor for the El Paso County Sherriff's Department Vendor must meet or exceed specifications
Brand or Company Names are being used <u>solely</u> for descriptive purposes and not restrictive. All materials and colors must match existing uniforms.
Please do not include tax, as the County is tax-exempt. We will sign tax exemption certificates covering these items. Please submit one (1) original copy and four (4) copies of your bid.

Company

Mailing Address

Federal Tax Identification No.

City, State, Zip Code

Ethics Representative (refer to page 2)

Ethics Training Date or Expiration Date

CIQ Document Number

Conflict of Interest Questionnaire (CIQ)
Filed Date

Representative Name & Title

Telephone Number include area code

Signature

Fax Number include area code

Date

Email Address

*****THESE TWO FORMS MUST BE THE FIRST PAGES ON ALL BIDS*****

Description	Unit Price
Deputy Champ Jacket	\$
Deputy Light Weight Jacket	\$
Deputy Class A Pant	\$
Deputy Men's Shirt – Long Sleeve	\$
Deputy Women's Shirt – Long Sleeve	\$
Deputy Men's Shirt – Short Sleeve	\$
Deputy Women's Shirt – Short Sleeve	\$
Deputy Motorcycle Breeches	\$
Deputy Rain Coat	\$
D.O. Woman's Class A Trouser Western Pockets 1722	\$
D.O. Men's Class A Trouser Western Pockets 1872	\$
D.O. Women's Short Sleeve Class A Shirt	\$
D.O. Men's Short Sleeve Class A Shirt	\$
D.O. BDU Tactical Shirt	\$
D.O. BDU Tactical Pants	\$
SRT BDU Tactical Shirt	\$
SRT BDU Pants	\$
Courthouse Black Pants	\$
Courthouse Men's Shirt – Long Sleeve	\$
Courthouse Men's Shirt – Short Sleeve	\$
Deputy Body Armor	\$

******PRICING MUST BE SUBMITTED ON THIS FORM******