



Construction Notes:


1. Contractor shall prepare and perform compaction on final lift of finish grades (95% compaction).
2. Concrete channel shall be 3,000 psi concrete at 28 day break.
3. Concrete shall have 3/4" max. aggregate size.
4. Contractor shall use 6x6x6 WWF as reinforcement for 6" concrete sidewalks
5. Contractor shall place expansion joints at 50 linear feet minimum or at the end of each day's pour or when abutting to existing concrete sidewalk or curbs.
6. Contractor shall install contraction joints at every 5 linear feet minimum.
7. Contractor shall tool finish all exposed surface edges.
8. Contractor shall provide a medium broom finish for all surface areas.
9. Contractor shall maintain a clean and neat construction site.
10. Contractor shall be responsible for maintaining their site secured and take all measures necessary to provide a safe working environment as per OSHA standards and regulations.
11. Contractor shall remove all construction debris and materials needed to install concrete sidewalks after they complete each roadway.
12. Contractor shall provide temporary traffic control measures to ensure safety of workers and end users.
13. Contractor shall protect daily work to prevent damages occurred during curing process.
14. Contractor shall place ADA ramps in accordance to the TXDOT standards as attached.

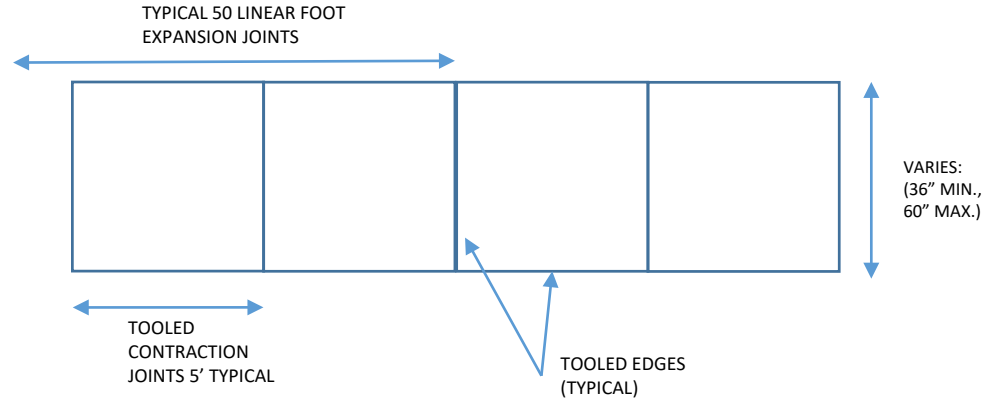


4" SIDEWALK DETAILS

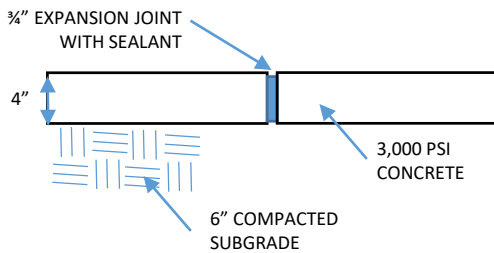

6" SIDEWALK DETAILS

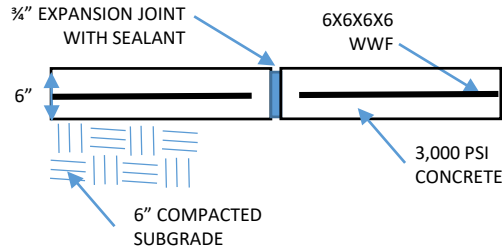

SIDEWALK CROSS-SECTION

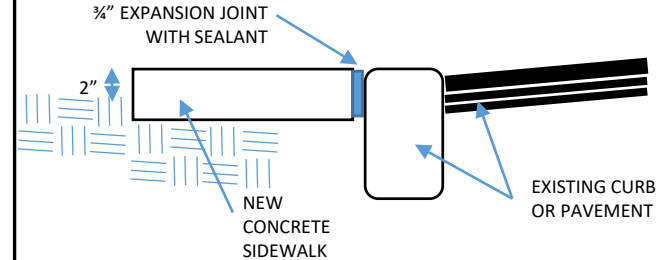

El Paso County – Countywide Sidewalk Repairs:

January 2022