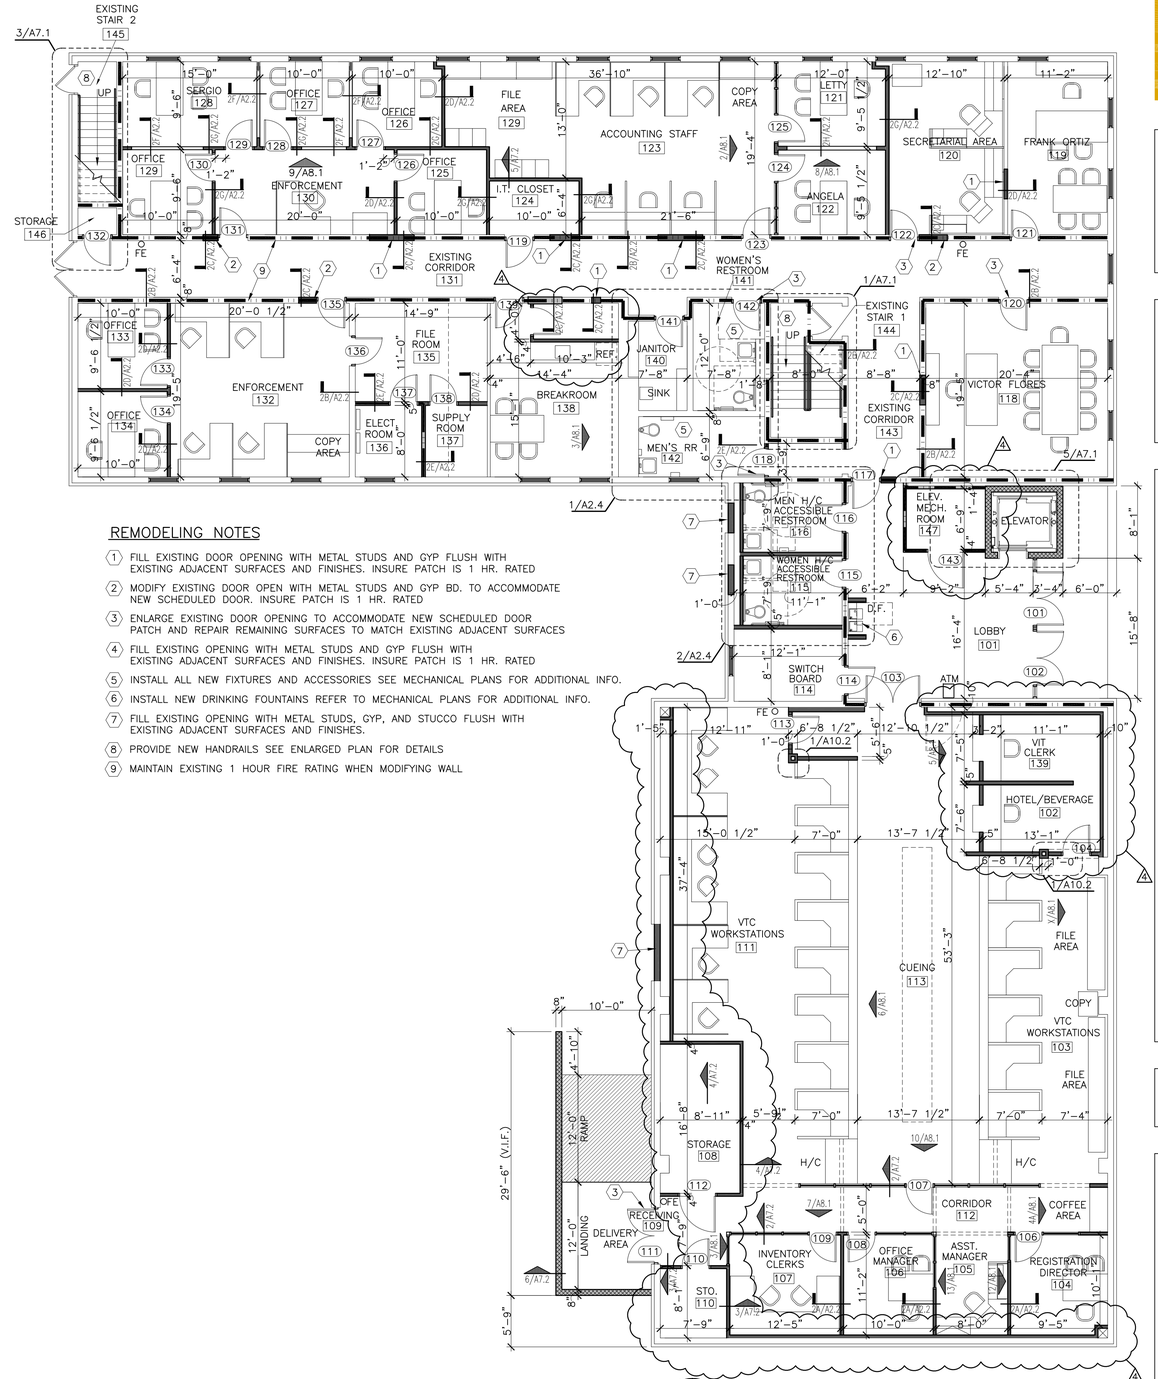

REMODELING NOTES

1. FILL EXISTING DOOR OPENING WITH METAL STUDS AND GYP FLUSH WITH EXISTING ADJACENT SURFACES AND FINISHES. INSURE PATCH IS 1 HR. RATED
2. MODIFY EXISTING DOOR OPEN WITH METAL STUDS AND GYP BD. TO ACCOMMODATE NEW SCHEDULED DOOR. INSURE PATCH IS 1 HR. RATED
3. ENLARGE EXISTING DOOR OPENING TO ACCOMMODATE NEW SCHEDULED DOOR PATCH AND REPAIR REMAINING SURFACES TO MATCH EXISTING ADJACENT SURFACES
4. FILL EXISTING OPENING WITH METAL STUDS AND GYP FLUSH WITH EXISTING ADJACENT SURFACES AND FINISHES. INSURE PATCH IS 1 HR. RATED
5. INSTALL ALL NEW FIXTURES AND ACCESSORIES SEE MECHANICAL PLANS FOR ADDITIONAL INFO.
6. INSTALL NEW DRINKING FOUNTAINS REFER TO MECHANICAL PLANS FOR ADDITIONAL INFO.
7. FILL EXISTING OPENING WITH METAL STUDS, GYP, AND STUCCO FLUSH WITH EXISTING ADJACENT SURFACES AND FINISHES.
8. PROVIDE NEW HANDRAILS SEE ENLARGED PLAN FOR DETAILS
9. MAINTAIN EXISTING 1 HOUR FIRE RATING WHEN MODIFYING WALL

1 REVISED FIRST FLOOR PLAN
SCALE: 1/8"= 1'-0"

CARL DANIEL FRANCO SALDAÑA
ARCHITECTS
305 LEON ST.
EL PASO, TX 79901
t. (915) 533-2700
f. (915) 533-2799
cardanielarchitects.com

REGISTERED ARCHITECT CARL DANIEL FRANCO SALDAÑA 4183 STATE OF TEXAS

REMODELING OF THE ASCARATE ANNEX FOR THE EL PASO COUNTY

301 MANNY MARTINEZ DR. , EL PASO, TEXAS 79905

THE COUNTY OF EL PASO TEXAS

ISSUED FOR CONSTRUCTION

NO.	DATE:	REVISION:
1	02/03/2015	REVISIONS

DATE: FEBRUARY 17, 2014

SHEET:
A2.2R
REVISED 1ST FLOOR PLAN

2013-32-REMODELING OF THE ASCARATE ANNEX FOR THE EL PASO COUNTY- 100% CONSTRUCTION DOCUMENTS FEBRUARY 17, 2014